


# Electric Power Fittings

## Copper Cable Terminals Non-Isolated - AUS Type

OUMO PUBLISH

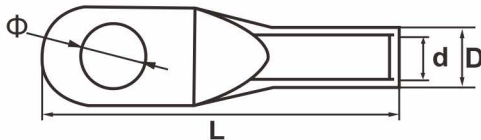

Specifications	Dimensions(mm)				Code No.
	Φ	D	d	L	
AUS-6	Φ5.2, Φ6.2, Φ8.2	5.5	4.1	37.5	OMU-AUS-001
AUS-10	Φ6.2, Φ8.2	6.5	5.1	37.5	OMU-AUS-002
AUS-16	Φ6.2, Φ8.2, Φ10.5	8	6	47	OMU-AUS-003
AUS-25	Φ6.2, Φ8.2, Φ10.5	10.5	8	52	OMU-AUS-004
AUS-35	Φ6.2, Φ8.2, Φ10.5, Φ12.5	12.5	9.5	55	OMU-AUS-005
AUS-50	Φ8.2, Φ10.5, Φ12.5	14.5	10.9	69	OMU-AUS-006
AUS-70	Φ8.2, Φ10.5, Φ12.5	16.5	12.7	72	OMU-AUS-007
AUS-95	Φ10.5, Φ12.5	19	14.8	80	OMU-AUS-008
AUS-120	Φ12.5, Φ16.5	20.5	16.1	86	OMU-AUS-009
AUS-150	Φ12.5, Φ16.5	23.5	18	95	OMU-AUS-010
AUS-185	Φ16.5	26	20.6	100	OMU-AUS-011
AUS-240	Φ16.5	28	22.4	112	OMU-AUS-012
AUS-300	Φ16.5, Φ20.5	30	23.6	119	OMU-AUS-013
AUS-400	Φ16.5, Φ20.5	34	26	140	OMU-AUS-014
AUS-500	Φ16.5, Φ20.5, Φ24.5	38	29	150	OMU-AUS-015
AUS-630	Φ16.5, Φ20.5, Φ24.5	45	35	160	OMU-AUS-016

These products are suitable for the connection of copper conductors (section 1.5-1000mm<sup>2</sup>) in power cables with electronic equipment. They are made of higher 99.9% pure copper tube T2 and coated with tin. Their working temperature is -55°C to 150°C.