
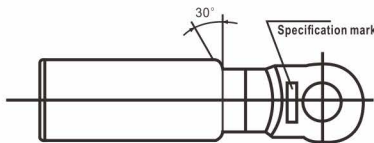


Electric Power Fittings

Bimetallic Cable Terminals -DTL-2 Type

OUMO PUBLISH

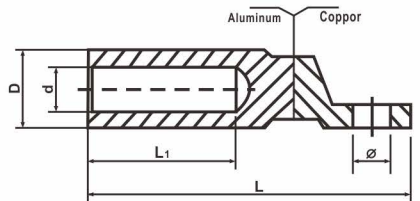

Specifications	Dimensions(mm)					Code No.
	Φ	D	d	L	L1	
DTL-2-16	11	16	5.5	80	38	OMU-DTL-2-001
DTL-2-25	11	16	6.5	80	38	OMU-DTL-2-002
DTL-2-35	11	16	8.2	80	38	OMU-DTL-2-003
DTL-2-50	13	20	9.7	91	43	OMU-DTL-2-004
DTL-2-70	13	20	11	91	43	OMU-DTL-2-005
DTL-2-95	13	20	12.5	91	43	OMU-DTL-2-006
DTL-2-120	13	25	14.5	115	60	OMU-DTL-2-007
DTL-2-150	13	25	16.5	115	60	OMU-DTL-2-008
DTL-2-185	13	32	17.5	125	60	OMU-DTL-2-009
DTL-2-240	13	32	19.5	125	60	OMU-DTL-2-010
DTL-2-300	13	34	23	131	61	OMU-DTL-2-011
DTL-2-400	13	34	26.2	131	61	OMU-DTL-2-012
DTL-2-400D	17	40	26.2	165	80	OMU-DTL-2-013
DTL-2-500	17	40	29	165	93	OMU-DTL-2-014
DTL-2-630	17	47	33	181	97	OMU-DTL-2-015

DTL-2 series copper-aluminium cable lug are suitable for transition connection of the circular aluminium, hemisphere-sector aluminium wires, power supply cables in the distribution equipment. The material of aluminium and copper is L3 and T2 respectively. The technology of friction welding is wonderfully adopted. Therefore they have features of strong weld intensity, good nature in electrification resistant galvanic corrosion and long service life.