


# Preinsulated Terminals

## PVC Insulated Male Lug

OUMO PUBLISH

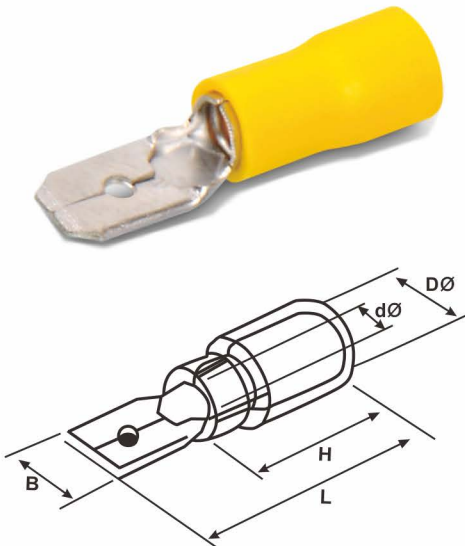

Specifications	NEMATAB	Thickness	Dimension					Remark	Code No.
			B	dØ	DØ	L	H		
			mm	mm	mm	mm	mm		
MDD1.25-110(5)	0.5x2.8	0.5	2.8	1.7	4.3	17.7	Material:Copper,PVC Wire range:0.5~1.5mm <sup>2</sup>	OMU-MDD-001	
MDD1.25-110(8)	0.8x2.8	0.8	2.8	1.7	4.3	17.7		OMU-MDD-002	
MDD1.25-187(5)	0.5x4.75	0.5	4.75	1.7	4.3	18.5		OMU-MDD-003	
MDD1.25-187(8)	0.8x4.75	0.8	4.75	1.7	4.3	18.5		OMU-MDD-004	
MDD1.25-250	0.8x6.3	0.4	6.3	1.7	4.3	21		OMU-MDD-005	
MDD2-110(5)	0.5x2.8	0.5	2.8	2.3	4.3	17.7	Material:Copper,PVC Wire range:1.5~2.5mm <sup>2</sup>	OMU-MDD-006	
MDD2-187(5)	0.5x4.75	0.5	4.75	2.3	4.3	18.5		OMU-MDD-007	
MDD2-187(8)	0.8x4.75	0.8	4.75	2.3	4.3	18.5		OMU-MDD-008	
MDD2-250	0.8x6.3	0.4	6.35	2.3	4.3	21		OMU-MDD-009	
MDD5.5-187	0.5x4.75	0.5	4.75	3.4	5.7	23	Material:Copper,PVC range:4~6mm <sup>2</sup>	OMU-MDD-010	
MDD5.5-250	0.8x6.3	0.4	6.3	3.4	5.7	25		OMU-MDD-011	