


Preinsulated Terminals

PVC Insulated Ring Terminals

OUMO PUBLISH

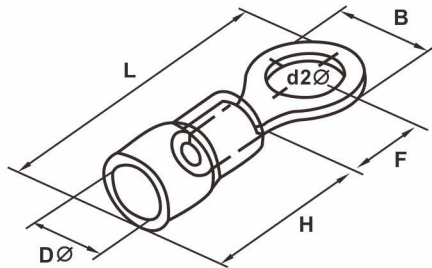

Specifications	USA Bolt No.	Bolt dia. d2	Dimension				H	DØ	Color	Remark	Code No.
			B	L	F						
RV1.25-3	#4	3.2mm	5.7	17.8	4.95	10	4.3	red	Material:Copper,PVC Wirerange:0.5~1.5mm ² Max.current=19A	OMU-RV-001	
RVS1.25-3.5	#6	3.7mm	5.7	17.8	4.95					OMU-RV-002	
RVM1.25-3.5	#6	3.7mm	6.6	20.1	6.3					OMU-RV-003	
RVL1.25-3.5	#6	3.7mm	8	21.5	7					OMU-RV-004	
RVS1.25-4	#8	4.3mm	6.6	20.1	6.3					OMU-RV-005	
RVL1.25-4	#8	4.3mm	8	21.5	7					OMU-RV-006	
RV1.25-4	#10	5.3mm	8	21.5	7					OMU-RV-007	
RV1.25-6	1/4	6.5mm	11.6	27.5	11.1					OMU-RV-008	
RV1.25-8	5/16	8.4mm	11.6	27.5	11.1					OMU-RV-009	
RV1.25-10	3/8	10.5mm	13.6	31.6	13.9					OMU-RV-010	
RV2-3	#4	3.2mm	6.6	17.8	4.3	10	4.9	blue	Material:Copper,PVC Wirerange:1.5~2.5mm ² Max.current=27A	OMU-RV-011	
RVS2-3.5	#6	3.7mm	6.6	17.8	4.3					OMU-RV-012	
RVM2-3.5	#6	3.7mm	6.6	21	7					OMU-RV-013	
RVL2-3.3	#6	3.7mm	8.5	22.5	7.75					OMU-RV-014	
RVS2-4	#8	4.3mm	6.6	21	7					OMU-RV-015	
RVL2-4	#8	4.3mm	8.5	22.5	7.75					OMU-RV-016	
RVS2-5	#10	5.3mm	8.5	22.5	7.75					OMU-RV-017	
RVL2-5	#10	5.3mm	9.5	22.5	7.25					OMU-RV-018	
RV2-6	1/4	6.5mm	12	27.6	11					OMU-RV-019	
RV2-8	5/16	8.4mm	12	27.6	11					OMU-RV-020	
RV2-10	3/8	10.5mm	13.6	30.2	13.9	OMU-RV-021					
RV3.5-4	#8	4.3	8.0	24.5	7.7	12.5	6.2	black	Material:Copper,PVC Wirerange:2.5~4mm ² Max.current=37A	OMU-RV-022	
RVS3.5-5	#10	5.3	8.0	24.5	7.7					OMU-RV-023	
RVL3.5-5	#10	5.3	12.0	27.9	7.7					OMU-RV-024	
RV3.5-6	1/4	6.5	12.0	27.9	7.7					OMU-RV-025	
RV5.5-3.5	#6	3.7mm	7.2	21.4	5.9					12.5	6.7
RVS5.5-4	#8	4.3mm	7.2	21.4	5.9	OMU-RV-027					
RVL5.5-4	#8	4.3mm	9.5	25.5	8.3	OMU-RV-028					
RV5.5-5	#10	5.3mm	9.5	25.5	8.3	OMU-RV-029					
RV5.5-6	1/4	6.5mm	12	31.5	13	OMU-RV-030					
RV5.5-8	5/16	8.4mm	15	33.7	13.7	OMU-RV-031					
RV5.5-10	3/8	10.5mm	15	33.7	13.7	OMU-RV-032					
RV5.5-12	1/2	13.0mm	19.2	38.1	16	OMU-RV-033					