
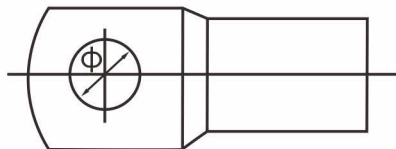


Electric Power Fittings

Copper Cable Terminals Non-Isolated - SC (JGK) Type

OUMO PUBLISH

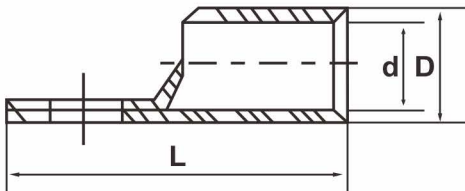

Specifications	Dimensions(mm)				Code No.
	D	d	Φ	L	
SC(JGK)-1.5	3.5	2.1	Φ4.2, Φ5.2	19	OMU-SC-001
SC(JGK)-2.5	4	2.5	Φ4.2, Φ5.2, Φ6.2	19	OMU-SC-002
SC(JGK)-4	4.8	3.4	Φ5.2, Φ6.2	20.5	OMU-SC-003
SC(JGK)-6	5.5	4.1	Φ5.2, Φ6.2, Φ8.2	23	OMU-SC-004
SC(JGK)-10	6.5	5.1	Φ5.2, Φ6.2, Φ8.2, Φ10.5	26.5	OMU-SC-005
SC(JGK)-16	8	6.4	Φ6.2, Φ8.2, Φ10.5	29.5	OMU-SC-006
SC(JGK)-25	9	7	Φ6.2, Φ8.2, Φ10.5, Φ12.5	33	OMU-SC-007
SC(JGK)-35	10.5	8.5	Φ6.2, Φ8.2, Φ10.5, Φ12.5	36	OMU-SC-008
SC(JGK)-50	12	9.8	Φ8.2, Φ10.5, Φ12.5, Φ14.5	43.5	OMU-SC-009
SC(JGK)-70	14.5	11.9	Φ8.2, Φ10.5, Φ12.5, Φ14.5	49.5	OMU-SC-010
SC(JGK)-95	16	13	Φ8.2, Φ10.5, Φ12.5, Φ14.5, Φ16.5	53.5	OMU-SC-011
SC(JGK)-120	19	15.4	Φ10.5, Φ12.5, Φ14.5, Φ16.5	61	OMU-SC-012
SC(JGK)-150	20.5	16.7	Φ10.5, Φ12.5, Φ14.5, Φ16.5	68	OMU-SC-013
SC(JGK)-185	23.5	19.3	Φ12.5, Φ14.5, Φ16.5	75	OMU-SC-014
SC(JGK)-240	26	21.2	Φ12.5, Φ14.5, Φ16.5	85	OMU-SC-015
SC(JGK)-300	30	24	Φ12.5, Φ14.5, Φ16.5, Φ20.5	95	OMU-SC-016
SC(JGK)-400	34	27.6	Φ12.5, Φ14.5, Φ16.5, Φ20.5	111	OMU-SC-017
SC(JGK)-500	38	31.6	Φ16.5, Φ20.5	123	OMU-SC-018
SC(JGK)-630	45	37.6	Φ16.5, Φ20.5	140	OMU-SC-019
SC(JGK)-800	50	39	Φ20.5	170	OMU-SC-020
SC(JGK)-1000	56	44	Φ20.5	200	OMU-SC-021

These products are suitable for the connection of copper conductors (section 1.5-1000mm²) in power cables with electronic equipment. They are made of higher 99.9% pure copper tube T2 and coated with tin. Their working temperature is -55°C to 150°C.